




## AC-HDSS2-8 v2.0 2 x 8 HDMI Switch Splitter

Advance Connex HDMI switch splitter 2x8 support 2 video sources with 8 output display terminals. It can easily split 2 ways HD signal sources to 8 screens or projectors which supported UHD resolution meantime feature with signal amplifier. The two input HD signal sources can be switched freely. The HDMI switch splitter supports highest video resolution up to 4K 60Hz.

### Features:

- Support HDMI 2.0
- Input: 2 x HDMI ports
- Output: 8 x HDMI ports
- Support 3D
- Support highest video resolution UHD 3840x2160, 4K60Hz
- Support 18 Gbps data rate for tmds clock up to 600Mhz
- Support 8/10/12 bit deep color
- Switching via push button or remote control

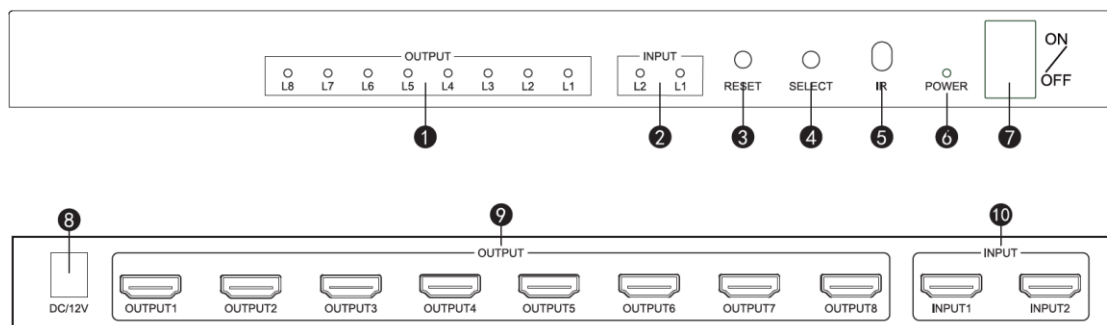


- 1: OUTPUT L8-L1 - - - Output port indicator;  
 2: INPUT L2-L1 - - - Input port indicator;  
 3: RESET - - - Restart button;  
 4: SELECT - - - Signal source switching button;  
 5: IR - - - Infrared port;

- 6: POWER - - - Power indicator;  
 7: ON / OFF - - - Power ON/OFF button;  
 8: DC / 12V - - - Power port;  
 9: OUTPUT1-8 - - - HDMI output port 1-8;  
 10: INPUT1-2 - - - HDMI input port 1-2;

**Specification:**

|                                        |                                             |
|----------------------------------------|---------------------------------------------|
| HDMI version .....                     | HDMI 2.0                                    |
| HDMI resolution .....                  | 4K60/1080p/1080i/720p/576p/576i/480p/480i   |
| Support video format .....             | 8/10/12bit deep color                       |
| Support audio format.....              | LPCM                                        |
| Max bandwidth.....                     | 600MHz                                      |
| Max baud rate.....                     | 18Gbps                                      |
| Input AWG26 HDMI cable distance .....  | (1080p resolution ≤10m), (4K resolution≤5m) |
| Output AWG26 HDMI cable distance ..... | (1080p resolution ≤10m), (4K resolution≤5m) |
| Max working current.....               | 0.93A                                       |
| Power adapter format Input: .....      | DC 12V 2A                                   |
| Operating Temperature range.....       | (-15 to +55)                                |
| Operating Humidity range.....          | 5 to 90%RH (No Condensation)                |
| Dimension (L x W x H).....             | 278x136x24 (mm)                             |
| Weight.....                            | 640g                                        |

**Connection Diagram:**

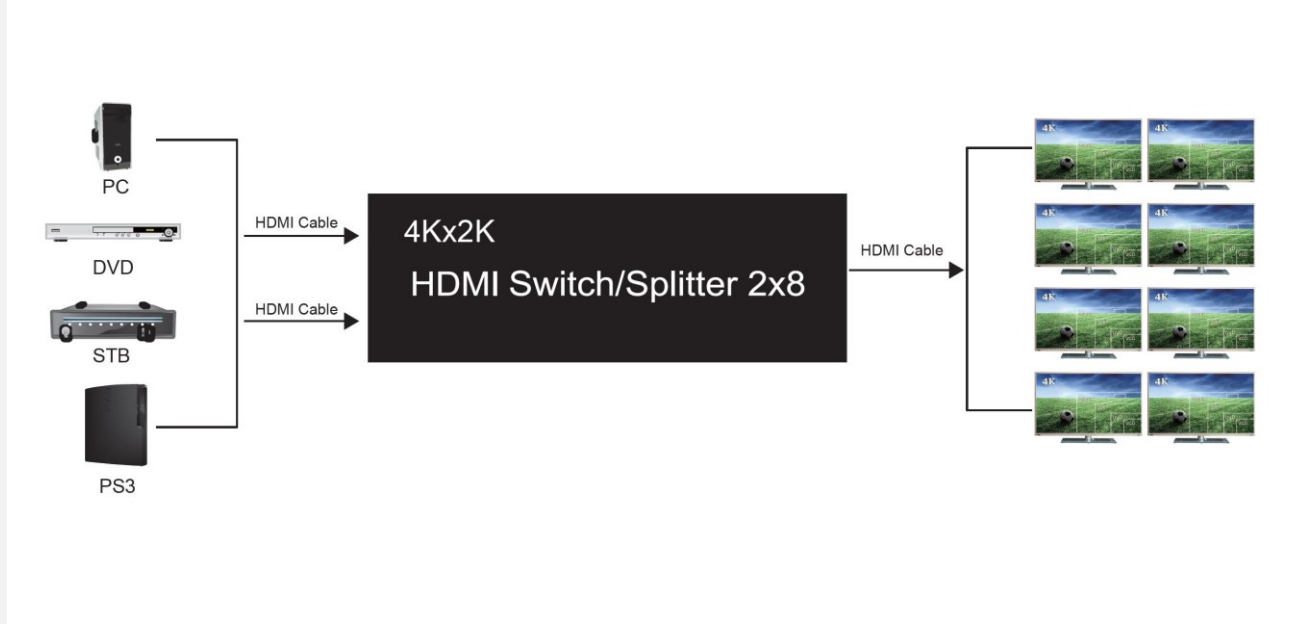

**Package Content:**

- HDMI Switch Splitter x 1 unit
- IR Remote Control x 1 unit
- 12V 2A Power adapter x 1 unit
- User Manual x 1 unit